

Introduction to FEM

2

The Direct Stiffness Method: Breakdown


The Direct Stiffness Method (DSM)

Importance: DSM is used by all major commercial FEM codes

A "democratic" method, works the same no matter what the element:




Bar (truss member) element,
2 nodes, 4 DOFs

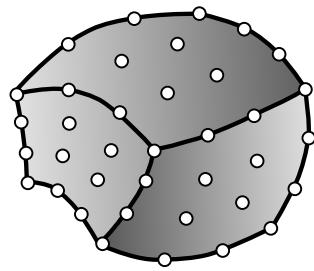


Tricubic brick element,
64 nodes, 192 DOFs

Obvious decision: use the truss to teach the DSM

Model Based Simulation (a simplification of diagrams of Chapter 1)

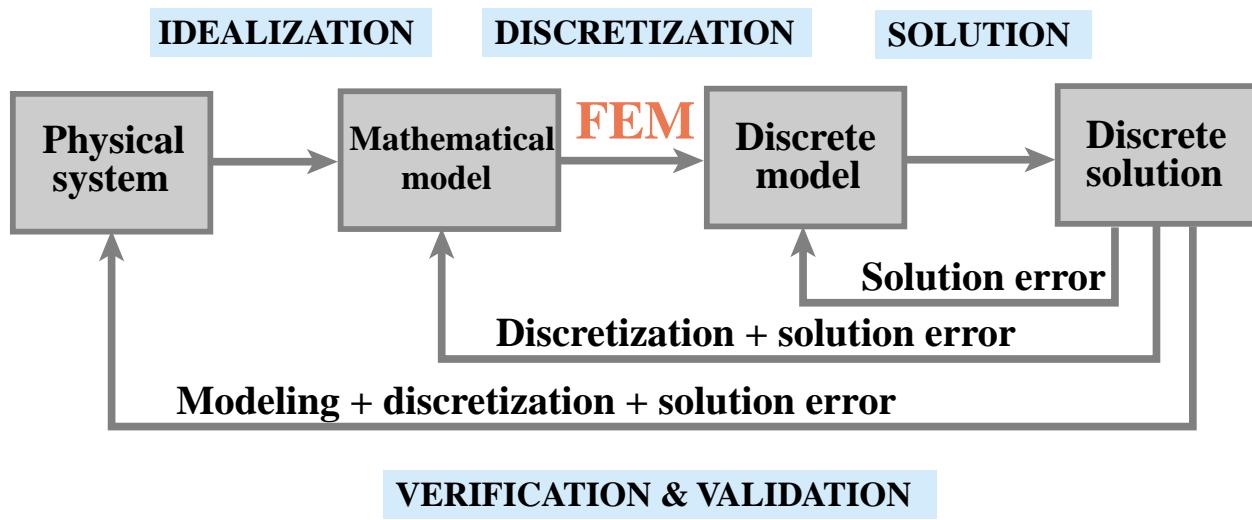


The Direct Stiffness Method (DSM) Steps

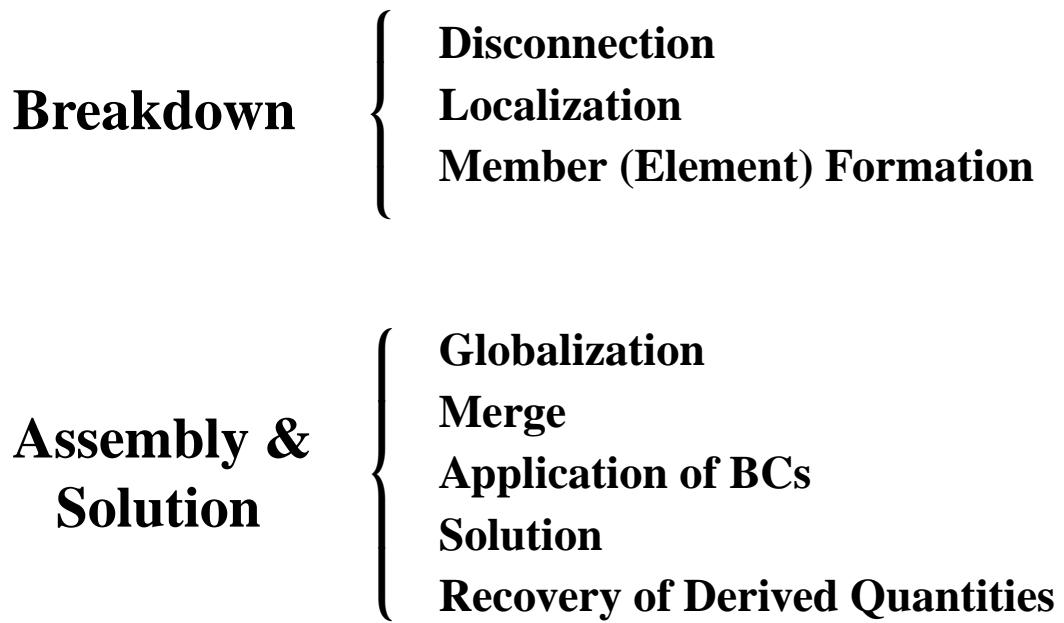


Introduction to FEM


The Example Truss: Physical Model (Loads not shown)

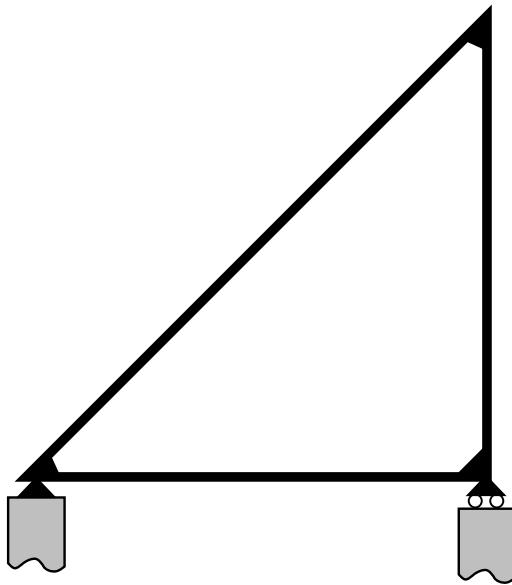

The Example Truss - FEM Model: Nodes, Elements and DOFs

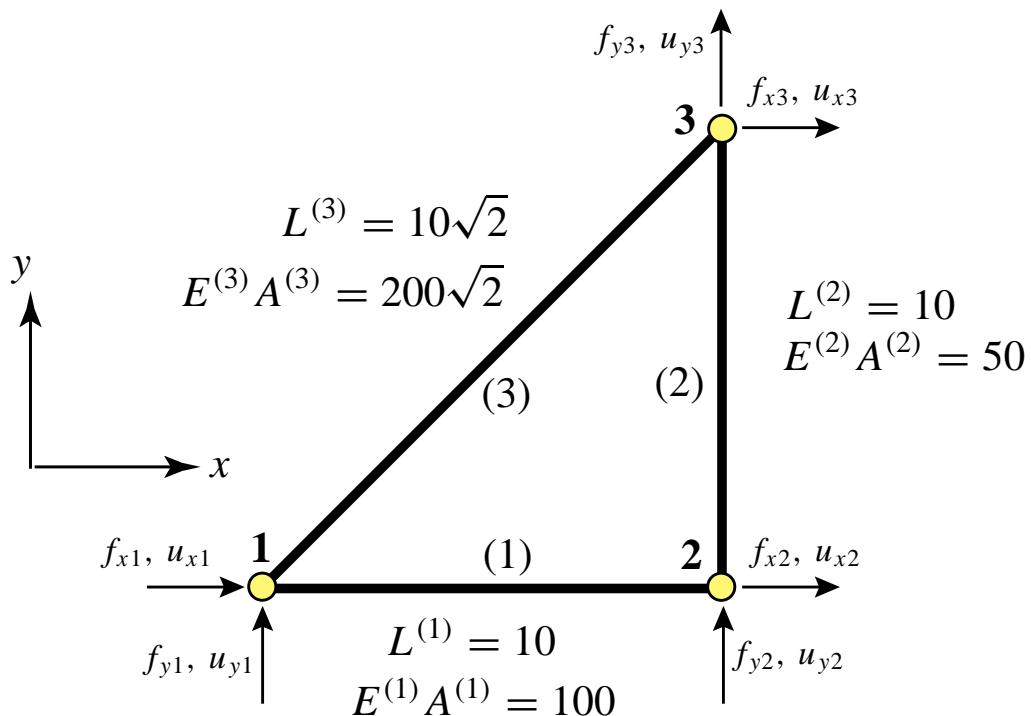

The Example Truss - FEM Model BCs: Applied Loads and Supports

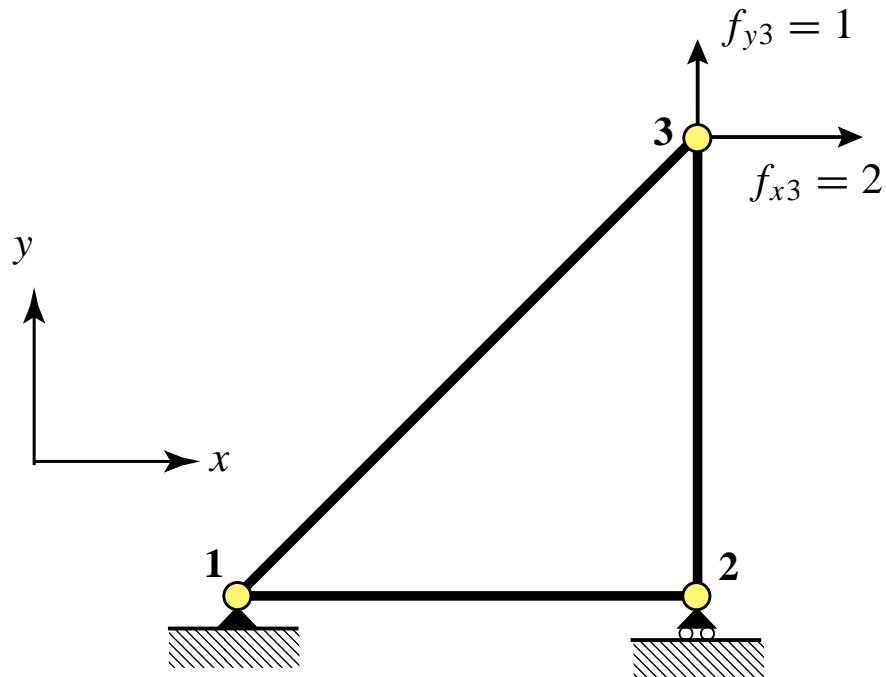

Master (Global) Stiffness Equations

$$\mathbf{f} = \begin{bmatrix} f_{x1} \\ f_{y1} \\ f_{x2} \\ f_{y2} \\ f_{x3} \\ f_{y3} \end{bmatrix} \quad \mathbf{u} = \begin{bmatrix} u_{x1} \\ u_{y1} \\ u_{x2} \\ u_{y2} \\ u_{x3} \\ u_{y3} \end{bmatrix}$$

Linear structure:

$$\begin{bmatrix} f_{x1} \\ f_{y1} \\ f_{x2} \\ f_{y2} \\ f_{x3} \\ f_{y3} \end{bmatrix} = \begin{bmatrix} K_{x1x1} & K_{x1y1} & K_{x1x2} & K_{x1y2} & K_{x1x3} & K_{x1y3} \\ K_{y1x1} & K_{y1y1} & K_{y1x2} & K_{y1y2} & K_{y1x3} & K_{y1y3} \\ K_{x2x1} & K_{x2y1} & K_{x2x2} & K_{x2y2} & K_{x2x3} & K_{x2y3} \\ K_{y2x1} & K_{y2y1} & K_{y2x2} & K_{y2y2} & K_{y2x3} & K_{y2y3} \\ K_{x3x1} & K_{x3y1} & K_{x3x2} & K_{x3y2} & K_{x3x3} & K_{x3y3} \\ K_{y3x1} & K_{y3y1} & K_{y3x2} & K_{y3y2} & K_{y3x3} & K_{y3y3} \end{bmatrix} \begin{bmatrix} u_{x1} \\ u_{y1} \\ u_{x2} \\ u_{y2} \\ u_{x3} \\ u_{y3} \end{bmatrix}$$

**Nodal
forces**

Master stiffness matrix

**Nodal
displacements**


$$\text{or } \mathbf{f} = \mathbf{K}\mathbf{u}$$

Member (Element) Stiffness Equations


$$\bar{\mathbf{f}} = \bar{\mathbf{K}} \bar{\mathbf{u}}$$

$$\begin{bmatrix} \bar{f}_{xi} \\ \bar{f}_{yi} \\ \bar{f}_{xj} \\ \bar{f}_{yj} \end{bmatrix} = \begin{bmatrix} \bar{K}_{xixi} & \bar{K}_{xiyi} & \bar{K}_{xixj} & \bar{K}_{xiyj} \\ \bar{K}_{yixi} & \bar{K}_{yiyi} & \bar{K}_{yixj} & \bar{K}_{yiyj} \\ \bar{K}_{xjxi} & \bar{K}_{xjyi} & \bar{K}_{xjxj} & \bar{K}_{xjyj} \\ \bar{K}_{yjxi} & \bar{K}_{yjyi} & \bar{K}_{yjxj} & \bar{K}_{yjyj} \end{bmatrix} \begin{bmatrix} \bar{u}_{xi} \\ \bar{u}_{yi} \\ \bar{u}_{xj} \\ \bar{u}_{yj} \end{bmatrix}$$

First Two Breakdown Steps: Disconnection and Localization

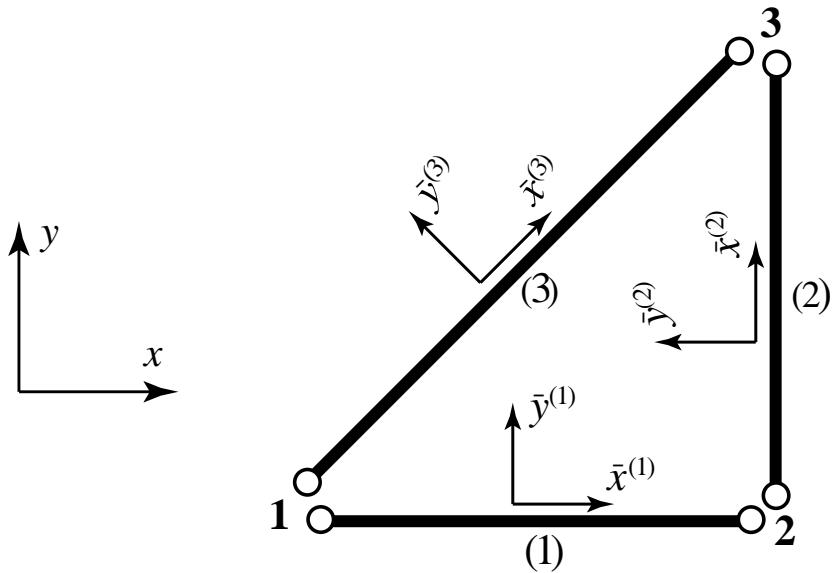

The 2-Node Truss (Bar) Element

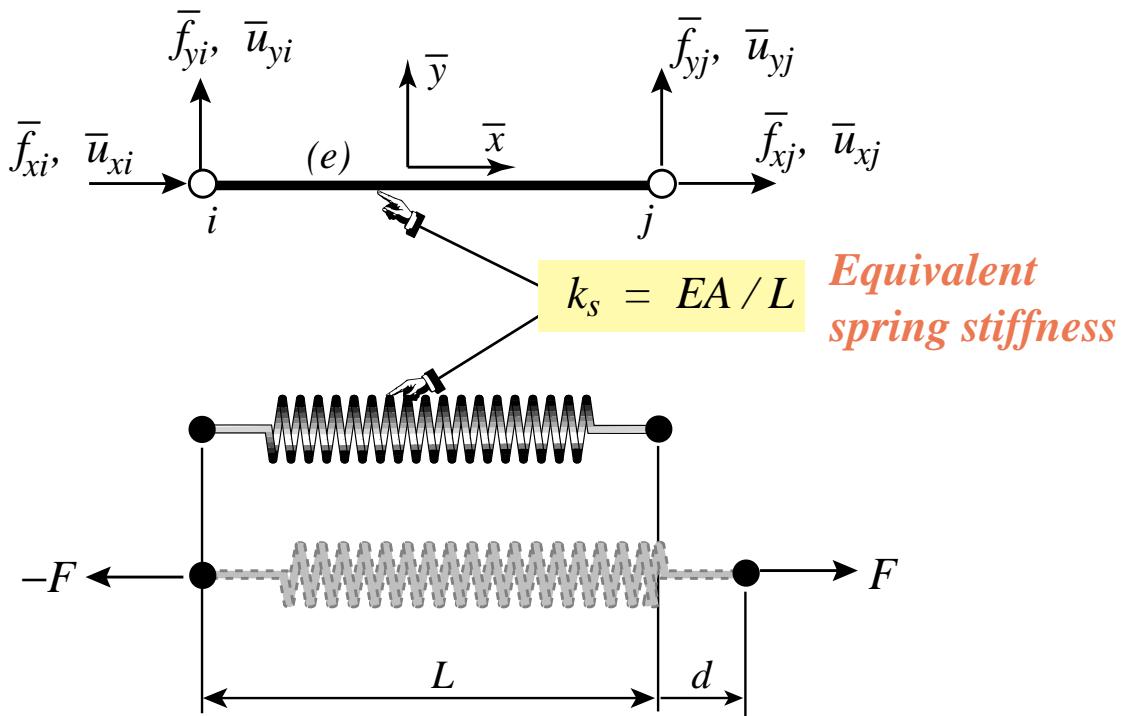

Truss (Bar) Element Formulation by Mechanics of Materials (MoM)

$$F = k_s d = \frac{EA}{L} d, \quad F = \bar{f}_{xj} = -\bar{f}_{xi}, \quad d = \bar{u}_{xj} - \bar{u}_{xi}$$

 (Exercise 2.3)

$$\begin{bmatrix} \bar{f}_{xi} \\ \bar{f}_{yi} \\ \bar{f}_{xj} \\ \bar{f}_{yj} \end{bmatrix} = \frac{EA}{L} \begin{bmatrix} 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} \bar{u}_{xi} \\ \bar{u}_{yi} \\ \bar{u}_{xj} \\ \bar{u}_{yj} \end{bmatrix}$$

Element stiffness
equations in local
coordinates

$$\bar{\mathbf{K}} = \frac{EA}{L} \begin{bmatrix} 1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 \\ -1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

Element stiffness
matrix in local
coordinates